


## Curved Tunnel Slides

### DEINOX RRK-35-2z1200-90 H3000

- Made of stainless steel AISI 304.
- Structure designed to be mounted to a tower/platform.
- On request it can be adapted for installation on an embankment.
- Recommended mounting height 2.75m – 3.00m.
- The inner surface of the slide is entirely an usable area.
- The slide has been designed in accordance with the EN 1176-3:2017-12 standard.
- 5-year warranty.

|  |         |
|--|---------|
| <b>H - Effective height</b>                                | 3,00 m  |
| <b>D - Effective diameter of slide</b>                     | 0,77 m  |
| <b>L - Effective length</b>                                | 6,845 m |
| Length of the starting section                             | 0,370 m |
| Length of the sliding section                              | 4,975 m |
| Length of the exit section                                 | 1,500 m |
| <b>Type of exit section according to EN 1176-3:2017-12</b> | Type 2  |
| <b>Max slope of descent</b>                                | 35°     |

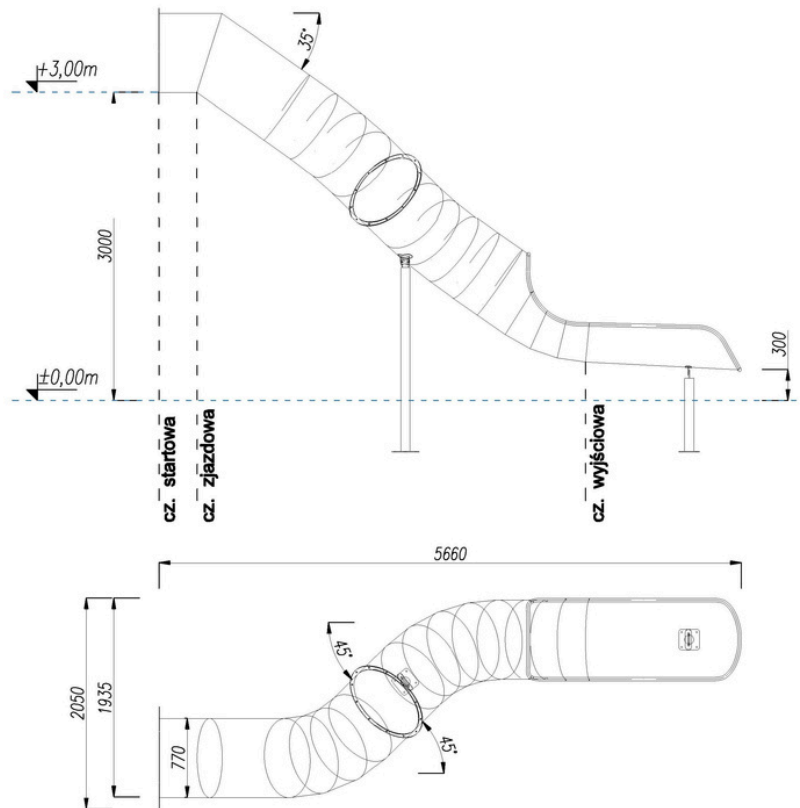

Design by DEINOX. Copying and distributing the content of the project or any part of it without the author's written consent is prohibited.