




Curved Tunnel Slides

DEINOX RRK-35-2z1500-90 H4000

- Made of stainless steel AISI 304.
- Structure designed to be mounted to a tower/platform.
- On request it can be adapted for installation on an embankment.
- Recommended mounting height 3.75m – 4.00m.
- The inner surface of the slide is entirely an usable area.
- The slide has been designed in accordance with the EN 1176-3:2017-12 standard.
- 5-year warranty.

H - Effective height	4,00 m
D - Effective diameter of slide	0,77 m
L - Effective length	9,214 m
Length of the starting section	0,370 m
Length of the sliding section	6,799 m
Length of the exit section	2,045 m
Type of exit section according to EN 1176-3:2017-12	Type 2
Max slope of descent	35°

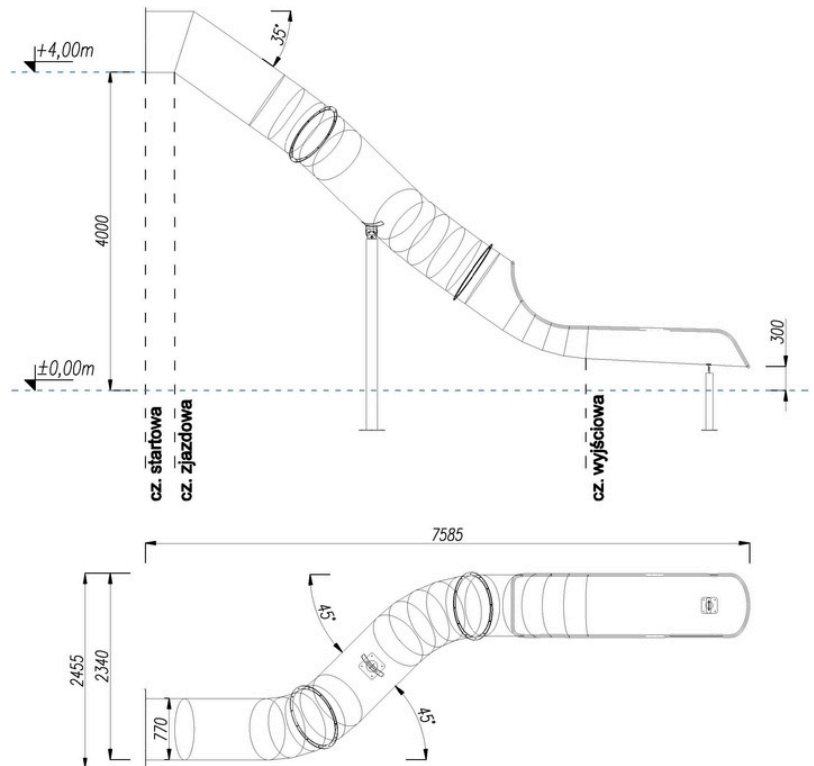

Design by DEINOX. Copying and distributing the content of the project or any part of it without the author's written consent is prohibited.